



RoHS Compliant

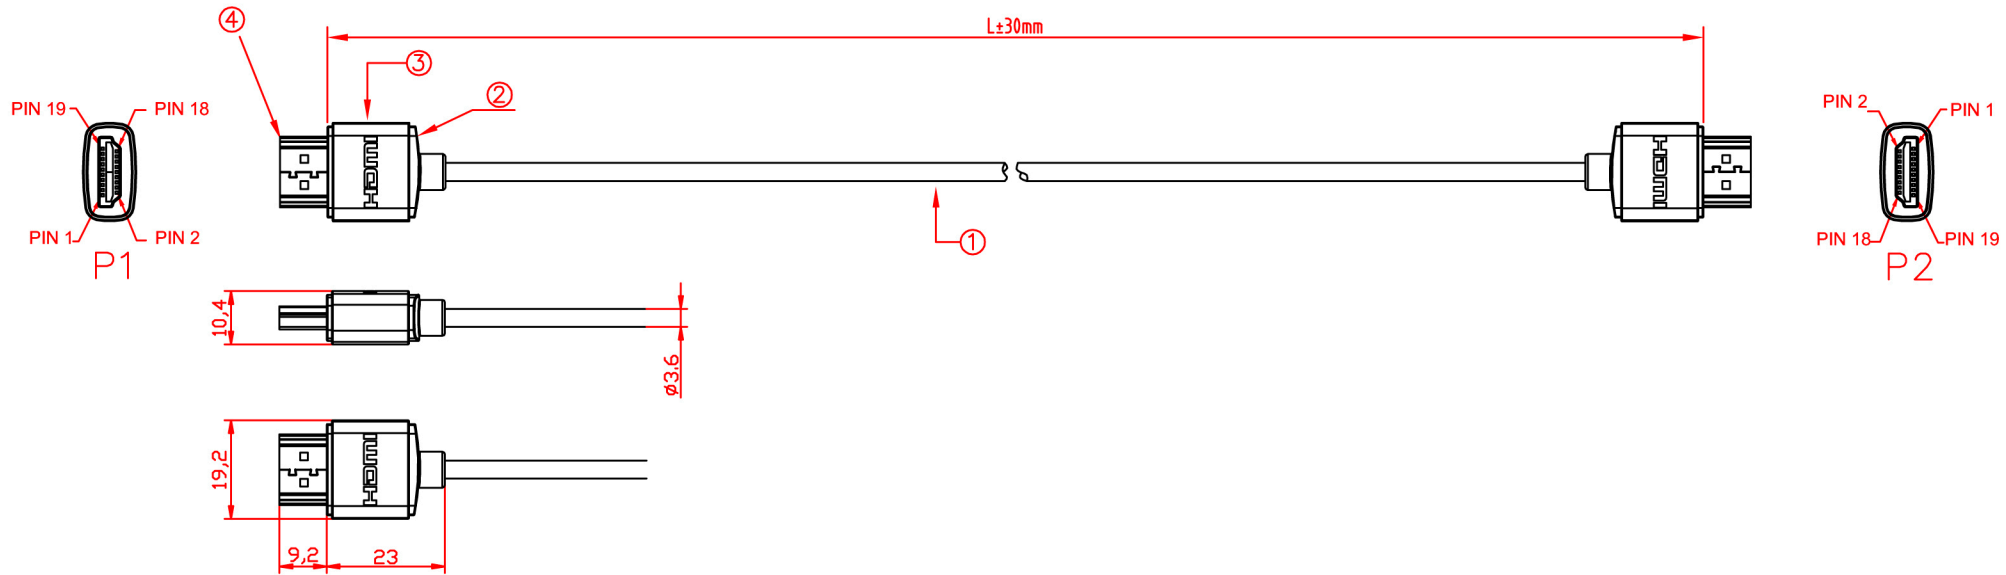

PIN Assignment

P1		P2	
1	Red	1	1Pair
3	White	3	
2	Drain	2	
4	Green	4	2Pair
6	White	6	
5	Drain	5	
7	Blue	7	3Pair
9	White	9	
8	Drain	8	
10	Brown	10	4Pair
12	White	12	
11	Drain	11	
13	Red	13	
18	White	18	
15	Yellow	15	
16	Orange	16	
14	YELLOW	14	
19	White	19	5Pair
17	Drain	17	
Shell	Braid	Shell	



CABLE SPECIFICATION:

36AWG 1.4 HDMI Cable/OD:3.6mm/BK
(1P*36AWG+D+AL)*5C*4C*36AWG+AL+B

ELECTRICAL CHARACTERISTICS:

Rated Temperature: 80℃ Rated Voltage:30V

Voltage Withstand: AC 500V/1min,NO Breakdown

Insulation Resistance: Min. 100Mohms/cable at 20℃

L(mm)	A(mm)
	30
	30

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
6			
5			
4	CONNECTOR	19 PINS HDMI GOLD PLATED	
3	OVERMOLD	PE LOW DENSITY 45P	
2	OVERMOLD	PE LOW DENSITY 45P	
1	CABLE	36AWG 1.4 HDMI Cable/OD:3.6mm/BK (1P*36AWG+D+AL)*5C*4C*36AWG+AL+B	
NO. PART NAME		SPEC DESCRIPTION	REMAKE
INNERMOLD		TOLERANCE UNSPECIFIED	MO-HDMI
		ANGLE	
OVERMOLD		DRAWN: zhang	NAME
		DESIGNER:	
		CHECKED: Krls	HDMI A.A M.M 1.4A
		APPROVED: Dived	
		SCALE NON	UNIT mm
		DRAWING NO. 180-180	SHEET 1/1
			REV 0.1